



15" TFT LCD Monitor Advertising Application



Where Versatility Meets Flexibility

P15BX-DW

Configuration		P15BX-DW
LCD Display		15" TFT active matrix panel
Pixel Pitch		0.297(H) x 0.297 (V) mm
Max. Resolution		XGA 1024 x 768
Contrast Ratio		400:1 (typical)
Brightness		250 Cd/m2 (typical)
Response Time (Tr+ Tf)		16 ms (typical)
Display Color		16M
Effective Display Area		304.1(H) x 228.1(V)
Viewing Angle (CR ≥ 10)		120° (H) x 100° (V)
Backlight		CCFL x 2
Lamp Life		40,000(hr)
Stand Base		Tilt down:0°, Tilt up:+20°
Input Signals		Analogue VGA ,Composite Video (NTSC/PAL)
Signal connector	Analog	D-sub 15 pin (VGA)
	Digital	DVI-D (option)
	Video-in	RCA, S-video
	MPEG	CF Card Player (option)
Scan Frequency		H. scan 31~60KHz, V. scan 60 ~ 75Hz
Audio System		1W/per channel driver
USB HUB		N/A
Key Control		Power on/off with LED, Menu, Select, Adjustment (+, -)
Operating Condition	Temperature	5°C-35°C (41°F-95°F)
	Humidity	20%-80% (no condensation)
	Altitude	To 10,000 feet
Storage Condition	Temperature	-20°C-60°C (-4°F-140°F)
	Humidity	10%-90% (no condensation)
Power		Universal power adaptor Input AC 100~240V , 50~60Hz Output DC 12V/3A
Power Consumption		36W
Power Management		VESA DPMS Standard
Dimensions (WxHxD)		351 x 333.5 x 162.8 mm
Dimensions(Carton)		450 x 340 x158 mm
Weight (Net)		3.1 Kg
Certification		C-UL, FCC, CE

* Specifications are subject to change without notice.

Features :

- * Fashionable housing design with foldable stand base
- * High contrast color TFT LCD display support resolution up to XGA 1024 x 768. Compatible with IBM VGA, VESA standards.
- * Support DDC1/2B for Plug & Play compatibility.
- * Advanced OSD control for picture quality adjustment
- * Multi-signals: VGA, DVI-D, Composite video, S-video, MPEG. (Auto detection of input signals)
- * Composite video system PAL/NTSC and SECAM compatible
- * Stable aluminum stand base with built-in power adaptor and cable management function (Option).
- * Optional VESA mounting
- * Built-in audio system
- * Optional MPEG solution.

Optional Accessories :

- * Anti-Glare tempered glass
- * Aluminum stand base


Ordering Information :

- * P15BX-DW VGA + Video-in
- * P15BX-DX VGA + Video-in + MPEG Player
- * P15BX-DE VGA + DVI + Video-in
- * P15BX-DY VGA + DVI + Video-in + MPEG Player



Mechanical drawing

I/O Ports

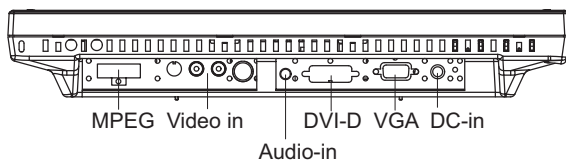

UNIT : mm

