

19" TFT LCD Monitor Advertising Application



Where Versatility Meets Flexibility

P19BH-DW

Configuration		P19BH-DW
LCD Display		19" TFT active matrix panel
Pixel Pitch		0.294(H) x 0.294 (V) mm
Max. Resolution		SXGA 1280 x 1024
Contrast Ratio		600:1 (typical)
Brightness		250 Cd/m ² (typical)
Response Time (Tr+ Tf)		25 ms (typical)
Display Color		16M
Effective Display Area		376.32(H) x 301.05(V)
Viewing Angle (CR _{≥10})		170° (H) x 170° (V)
Backlight		CCFL x4
Lamp Life		40,000(hr)
Stand Base		Tilt down:0°, Tilt up:+20°
Input Signals		Analogue VGA , Composite Video (NTSC/PAL)
Signal connector	Analog	D-sub 15 pin (VGA)
	Digital	DVI-D (option)
	Video-in	RCA, S-video
	MPEG	CF Card Player (option)
Scan Frequency		H. scan 31~80KHz, V. scan 60 ~ 75Hz
Audio System		1W/per channel driver
USB HUB		N/A
Key Control		Power on/off with LED, Menu, Select, Adjustment (+, -)
Operating Condition	Temperature	5°C-35°C (41°F-95°F)
	Humidity	20%-80% (no condensation)
	Altitude	To 10,000 feet
Storage Condition	Temperature	-20°C-60°C (-4°F-140°F)
	Humidity	10%-90% (no condensation)
Power		Universal power adaptor Input AC 100~240V, 50~60Hz; Output DC 12V / 4A
Power Consumption		48W
Power Management		VESA DPMS Standard
Dimensions (WxHxD)		438 x 454 x 203.4 mm
Dimensions(Carton)		452 x 540 x 161mm
Weight (Net)		5.9 Kg
Certification		C-UL, FCC, CE

* Specifications are subject to change without notice.

Features :

- * Fashionable housing design with foldable stand base.
- * High contrast color TFT LCD display support resolution up to SXGA 1280 x 1024. Compatible with IBM VGA, VESA standards.
- * Support DDC1/2B for Plug & Play compatibility.
- * Advanced OSD control for picture quality adjustment.
- * Multi-signals: VGA, DVI-D, Composite video, S-video, MPEG (Auto detection of input signals).
- * Composite Video System PAL/NTSC and SECAM Compatible.
- * Stable aluminum stand base(Optional).
- * Optional VESA Mounting.
- * Built-in Audio System.
- * Optional MPEG solution.

Optional Accessories :

- * Anti-Glare tempered glass
- * Aluminum stand base




Ordering Information :

- * P19BH-DW VGA+Video-in
- * P19BH-DX VGA+Video-in+MPEG Player
- * P19BH-DE VGA+DVI+Video-in
- * P19BH-DY VGA+DVI+Video-in+MPEG Player

Mechanical drawing

I/O Ports

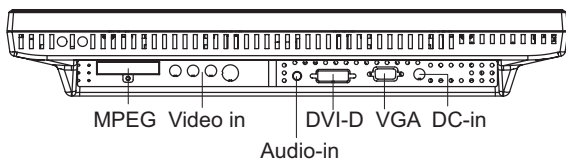

UNIT : mm

