

# 17" TFT LCD Monitor Advertising Application



Where Versatility Meets Flexibility

## P17BH-DW

### Configuration

### P17BH-DW

LCD Display	17" TFT active matrix panel
Pixel Pitch	0.264(H) x 0.264 (V) mm
Max. Resolution	SXGA 1280 x 1024
Contrast Ratio	450:1 (typical)
Brightness	250 Cd/m <sup>2</sup> (typical)
Response Time ( Tr+ Tf )	16 ms (typical)
Display Color	16M
Effective Display Area	337.92(H) x 270.33(V)
Viewing Angle (CR ≥ 10)	140° (H) x 140° (V)
Backlight	CCFL x4
Lamp Life	40,000(hr)
Stand Base	Tilt down:0°, Tilt up:+20°
Input Signals	Analogue VGA ,Composite Video (NTSC/PAL)
Signal connector	Analog D-sub 15 pin (VGA) Digital DVI-D (option) Video-in RCA, S-video MPEG CF Card Player (option)
Scan Frequency	H. scan 31~80KHz, V. scan 56 ~ 75Hz
Audio System	1W/per channel driver
USB HUB	N/A
Key Control	Power on/off with LED, Menu, Select, Adjustment (+, -)
Operating Condition	Temperature 5°C-35°C (41°F-95°F) Humidity 20%-80% (no condensation) Altitude To 10,000 feet
Storage Condition	Temperature -20°C-60°C ( -4°F-140°F ) Humidity 10%-90% ( no condensation )
Power	Universal power adaptor , Input AC 100~240V, 50~60Hz Output DC 12V / 4A
Power Consumption	48W
Power Management	VESA DPMS Standard
Dimensions (WxHxD)	392 x 425 x 203.4 mm
Dimensions(Carton )	452 x 456 x 150 mm
Weight (Net)	5.1 Kg
Certification	C-UL, FCC, CE

\* Specifications are subject to change without notice.

### Features :

- \* Fashionable housing design with foldable stand base.
- \* High contrast color TFT LCD display support resolution up to SXGA 1280 x 1024. Compatible with IBM VGA, VESA standards.
- \* Support DDC1/2B for Plug & Play compatibility.
- \* Advanced OSD control for picture quality adjustment
- \* Multi-signals: VGA, DVI-D, Composite Video, S-video, MPEG. (Auto detection of input signals)
- \* Composite video system PAL/NTSC and SECAM compatible.
- \* Stable aluminum stand base (option).
- \* Optional VESA mounting.
- \* Built-in audio system.
- \* Optional MPEG solution.

### Optional Accessories :

- \* Anti-Glare tempered glass
- \* Aluminum stand base


### Ordering Information :

- \* P17BH-DW VGA+Video-in
- \* P17BH-DX VGA+Video-in+MPEG Player
- \* P17BH-DE VGA+DVI+Video-in
- \* P17BH-DY VGA+DVI+Video-in+MPEG Player



### Mechanical drawing

#### I/O Ports

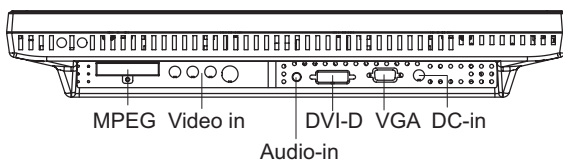

#### UNIT : mm

